



Bring The

HEAT



VAL6

www.NAPAHeaters.com



Feel the Difference

Premier Portable Diesel/Kerosene Radiant-Infrared Heater

- ✓ Windproof & Extreme Weather Approved
- ✓ Can be powered from a vehicle with DC-AC inverter
- ✓ Can recoup cost in a single season's fuel savings
- ✓ Outperforms 300K BTU "torpedo heaters"
- ✓ Remote thermostat option available

Applications: Automotive, Sport Venues, Mining, Forestry, Outdoor Dining, Construction, Agriculture, Garages, etc.



The torpedo heater: Just blows hot air.



Disadvantages of a Torpedo Heater:

- High Fuel Consumption
- Harmful Fumes
- Unsafe Noise Level
- Heat Loss from Wind & Weather
- Inefficient Heating Method
- Ongoing Maintenance

Heat Distribution Comparison VAL6 KBE5S-V vs. Torpedo Heater

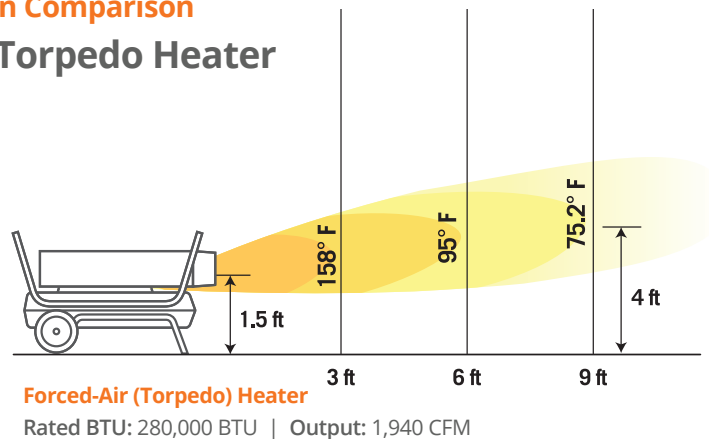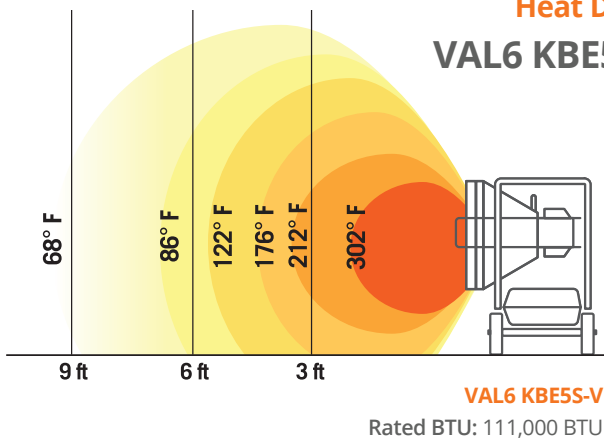



KBE5S-V
Part No. 06001074

Daystar
Part No. 06001075

Double the heat – half the fuel

VAL6's state-of-the-art combustion chamber enables virtually 100% fuel to energy conversion. This translates to clean, odorless*, smokeless operation†, and more importantly, fuel savings.



Runs on Diesel
OR Kerosene



Indoor & Outdoor
Approved†



Radiant Heat




Low Noise during
Operation



10-Hour Runtime
(KBE5S-V)


How Loud is TOO LOUD?

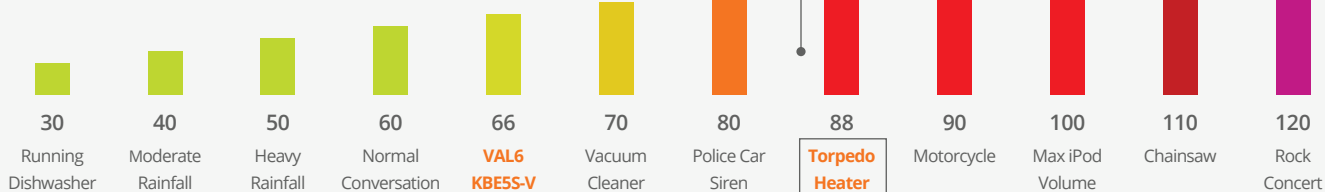


The Max Safe Exposure to Sound is 85dB

Excessive exposure to levels above 85dB can cause headaches, nausea, and **long-term hearing loss**.

Straight-On Heating / Drying VAL6 KBE5S-V vs. Torpedo Heater

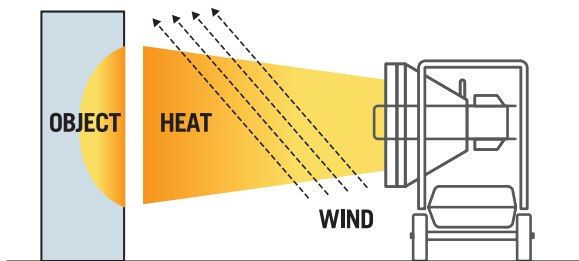

VAL6 KBE5S-V

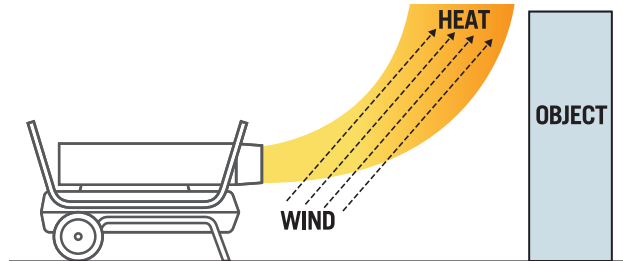

Forced-Air (Torpedo) Heater

* Initial startup may release odor from products used in manufacturing. † Always use in a well ventilated area. Commercial use only.

Call us anytime, for any reason: (844)534-8053

Contact us for more info (844)534-8053



KBE5S-V Specifications

Part Number	EL 06001074
Fuel Input	111,000 BTU/hr
Fuel	Kerosene & Diesel
Fuel Usage	0.85 gal/hr
Tank Capacity	9 gallons
Power Source	120V, 60Hz
Power Consumption	100W
Control System	5 sec. Pre-purge 330 sec. Post-purge
Safety Device	Photocell flame monitor, 3A Fuse, Tip-over switch
Adjustable Disk Angle	Tilts upward 20°
Dimensions (H x W x D)	36.1 x 25.8 x 27.7 inches
Dry Weight	83.8 lbs



Daystar Specifications

Part Number	EL 06001075
Fuel Input	51,200 BTU/hr
Fuel	Kerosene & Diesel
Fuel Usage	0.4 gal/hr
Tank Capacity	2.6 gallons
Power Source	120V, 60Hz single phase
Power Consumption	120W
Control System	5 sec. Pre-purge 330 sec. Post-purge
Safety Device	Photocell flame monitor, 3A Fuse, Overheat prevention system, Tip-over switch
Burner Type	High pressure spray gun type
External Dimensions (H x W x D)	23.4 x 12.2 x 22.8 inches
Dry Weight	40 lbs

Applications: Automotive, Sport Venues, Mining, Forestry, Outdoor Dining, Construction, Agriculture, Garage, etc.

