

75H WASTE OIL HEATER

Don't call him little


You'll just get him fired up.



 **energylogic**™

**Designed for fitting in corners
without cutting any.**

Customer-inspired for small shops and DIY garages.

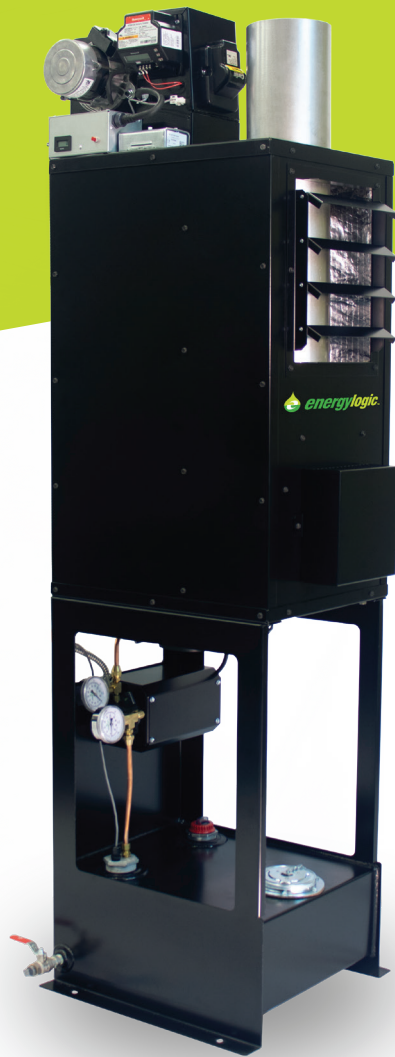

75H Waste Oil Heater

SPECIFICATIONS

Fuel Flow Rate	0.54 gallon/hour (2.0 L/hour)
BTU	75,000 BTU / hour (21.98 kW/hour)
Heat Rise over Input Air	100° F (250° F max outlet temp)
Air Flow	500 CFM
Warm Outlet Dimensions	10" x 12.5" (no ductwork allowed)
Exhaust Flue Diameter	6" (15cm)
Unit Dimensions	75" H x 21" W x 26" L
Unit Weight	210 lbs
Tank Storage	10 gallons
Shipping Dimensions	48" H x 40" W x 50" L
Shipping Weight	340 lbs (Roof Flue) 375 lbs (Wall Flue)
Approved Fuels	Used crankcase oils, ATF, No. 2 fuel oil
Electrical Requirements	115 VAC 60Hz, 8 amps. Connect to 10 amp circuit breaker (15 amp max)
Regulation and Certification	UL Listed - U.S. and Canada
Warranty	1 year or 1500 hours*
Area Coverage	Heats up to 1750 sq. ft.
Mounting	Bolts to non-combustible flooring
Flue	Exhaust through 6-Inch, Class A flue



Included with Unit

Tee and draft control damper, air compressor, metering pump, draft manometer, hour meter, tank gauge, low fuel cutoff with indicator light, programmable thermostat, cleanable oil strainer in fill port and on pickup tube, flue kit (enough flue for a 16 ft roof)

*A second year will be activated when the product is registered with the manufacturer within the first 30 days of receipt of the product.



For more information call (800) 311-8828
or visit energyLogic.com

